

Install Exalate for Azure DevOps Server

Last Modified on 01/15/2026 7:37 pm EST


To install **Exalate** for **Azure DevOps Server**, contact the [Exalate team](#).

After receiving your request, the team collects the required configuration details and assigns an **Exalate node** to your Azure DevOps (ADO) Server instance. Once the setup is complete, you will receive the **node URL** at the email address you provided. Use this URL to log in to Exalate for your ADO instance.

Configuration Steps

1. Access the Exalate node

When you access the node for the first time, the **Personal Access Token (PAT)** configuration screen appears.

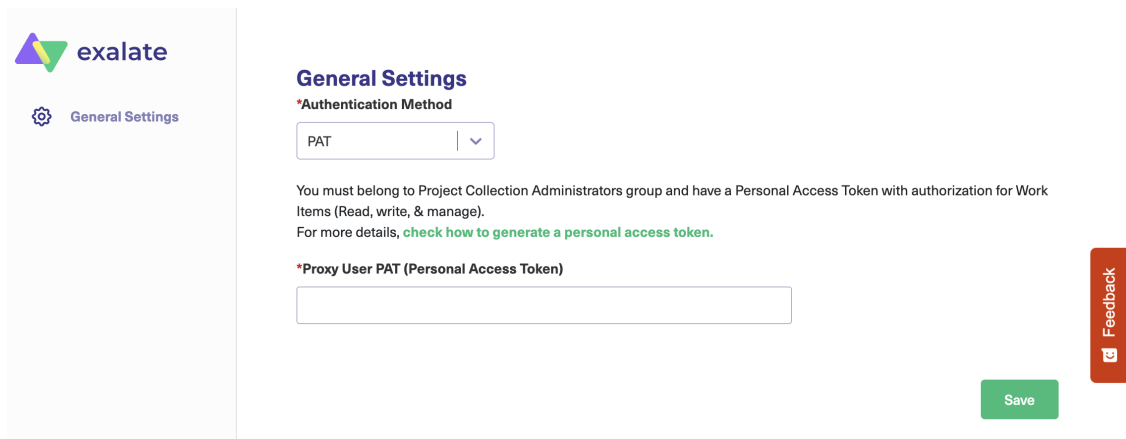

The screenshot shows the Exalate web interface. On the left is a sidebar with the Exalate logo and a 'General Settings' link. The main content area is titled 'General Settings' and contains the following elements: a section for 'Authentication Method' with a dropdown menu set to 'PAT'; a text block stating that the user must belong to the 'Project Collection Administrators' group and have a PAT with 'Read, write, & manage' permissions, with a link to 'check how to generate a personal access token'; a section for '*Proxy User PAT (Personal Access Token)' with an empty text input field; a green 'Save' button at the bottom right; and a vertical red 'Feedback' button on the far right.

2. Add the Personal Access Token (PAT)

Enter the PAT for your ADO Server instance. Refer to [How to Generate PAT in Azure DevOps Server](#) for detailed instructions.

The PAT must have the following permissions for Exalate to function properly:


- **Work Items:** Read & Write
- **Project and Team:** Read
- **Identity:** Read (for user mapping)
- **Code:** Read (if synchronizing repository links)

3. Save the configuration

Click **Save** to link your Azure DevOps instance with the assigned Exalate node.

4. Authenticate with the PAT

After saving, a login screen appears. Re-enter your PAT and click **Login** to complete authentication.

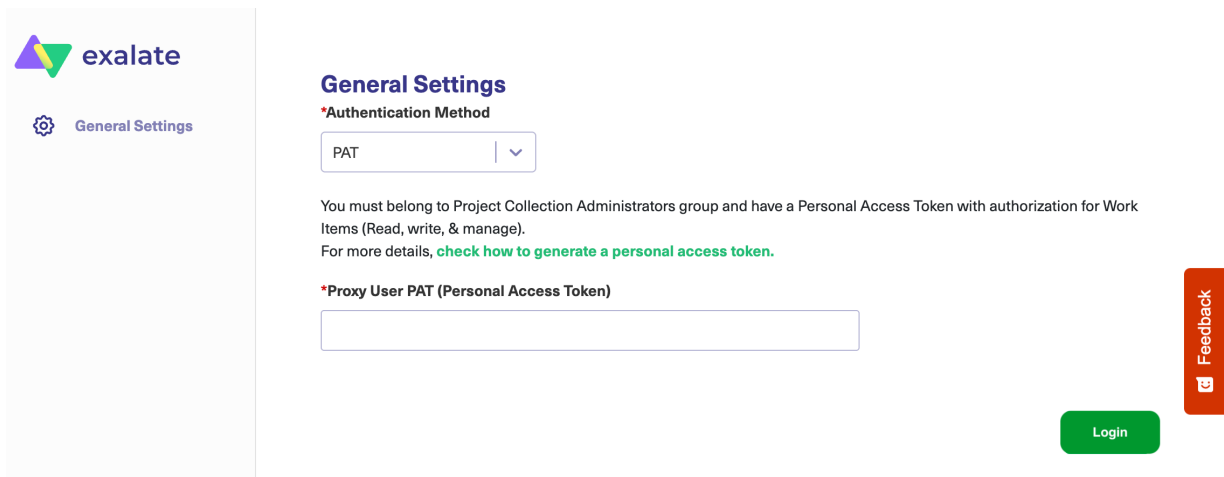

The screenshot shows the 'General Settings' page for Exalate. On the left is a sidebar with the Exalate logo and a 'General Settings' link. The main content area is titled 'General Settings' and features a section for 'Authentication Method' with a dropdown menu currently set to 'PAT'. Below this, a text box is labeled '*Proxy User PAT (Personal Access Token)'. A green 'Login' button is positioned at the bottom right of the settings area. A vertical orange 'Feedback' button is located on the far right edge of the page.

5. You can now start using **Exalate** to synchronize data between your Azure DevOps Server instance and other connected platforms.

Product

[About Us](#)

[Release History](#)

[Glossary](#)

ON THIS PAGE

[API Reference](#)

[Configuration Steps](#)

[Security](#)

[Pricing and Licensing](#)

Resources

[Subscribe for a weekly Exalate hack](#)

[Academy](#)

[Blog](#)

[YouTube Channel](#)

[Ebooks](#)

Still need help?

[Join our Community](#)

[Visit our Service Desk](#)

[Find a Partner](#)