

Accept the Connection Invitation in Script Mode for Jira Cloud


Last Modified on 01/15/2026 7:12 pm EST

Note: To accept the Connection invitation you need an **Invitation Code**. The **Invitation Code** includes **pre-populated** Connection details such as Connection name, instance short names, and Destination instance URL. You are only required to finish the configuration by accepting the invitation.

Accept the Connection Invitation in Script Mode from Jira Cloud

1. Navigate to the **Connections** tab in the Exalate console.

Click **Settings** → **Apps** & click **Connections** under the **Exalate** menu.

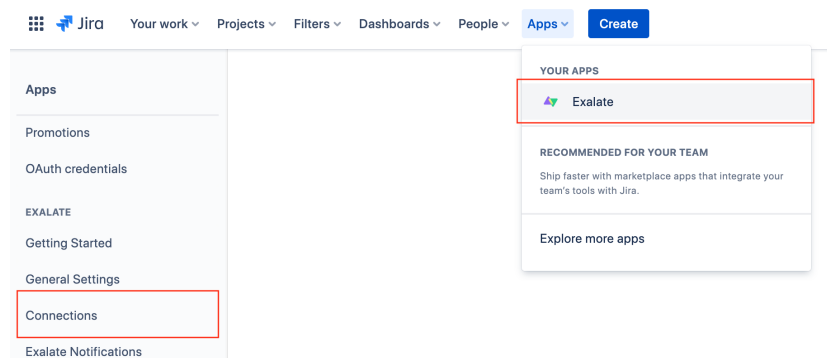

2. Click **Accept invitation**.

Connections

Connection defines synchronization behavior, including communication details, sync rules, and scope.

Initiate connection

Accept invitation



3. Paste the invitation code.

Paste the invitation code that you received from the other side.

And click **Next**.

[illegible]

✕

11

✕

What's Next?

After accepting the connection invitation proceed to [configure the connection](#). Remember, with Exalate you need to set up the configuration for both integrating sides independently, depending on your integration requirements.

Product

ON THIS PAGE

[About Us](#) 

[Release History](#) 

[Accept the Connection Invitation in Script Mode from](#)

[Glossary](#) 

[Jira Cloud](#)

[API Reference](#) 

[What's Next?](#)

[Security](#) 

[Pricing and Licensing](#) 

Resources

[Subscribe for a weekly Exalate hack](#) 

[Academy](#) 

[Blog](#) 

[YouTube Channel](#) 

[Ebooks](#) 

Still need help?

[Join our Community](#) 

[Visit our Service Desk](#) 

[Find a Partner](#) 