

# Accept the Connection Invitation in Script Mode for Jira On-premise


Last Modified on 01/15/2026 7:17 pm EST

**Note:** To accept the Connection invitation you need an **Invitation Code**. The **Invitation Code** includes **pre-populated** Connection details such as Connection name, instance short names, and Destination instance URL. You are only required to finish the configuration by accepting the invitation.


## Accept the Connection Invitation in Script Mode from Jira On-premise

1. Navigate to the **Connections** tab in the Exalate console.

Click **Settings** → **Apps** & click **Connections** under the **Exalate** menu.

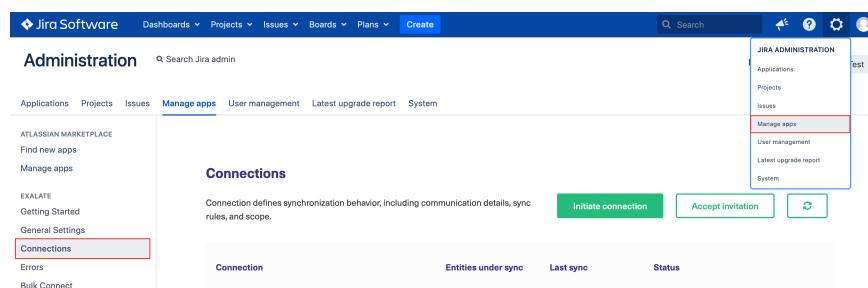

2. Click **Accept the invitation**.



3. Paste the invitation code.

Paste the invitation code that you received from the other side.

And click **Next**.

Accept Invitation
×

Please paste the invitation code, received from your partner

Enter the invitation code

```
eyJpbnZpdGF0aW9uU2VjcmV0joiNUI2SpnGckZHbGhQzInVGQb1NKN3pablp0clV3MWUiLCJpbnZpdGVkSW5zdGFuY2VvWaWQiOjNmMDYwYmE2Yy0xNTg5LTQxNDUyTT2MS03MGlzNWUyMjgzQjQlCjub2RISW5mbly6eyJuV1ljoibmFib28lCjYXNIVXjsjjoiaHR0cHM6Ly9qY2xvdWRub2RILWxxZ2Ytb3Zzei14c250LXFicmEuZXhbbGF0ZS5jbg91ZCIsImlc3VlVHJhY2tclVybCl6mh0dHBzOi8vbmFib28uYXRsyXNzaWfUlm5dClslm5zGVUeXbIjjoSkISQV9DTE9RCIsImlc3VlVHJhY2tclVzcNpb24iOiI3JAuMCIsIm5vzGVBchHBWZXjaW9uljoIly4wLjAiLCjub2RIVmVyc2lvbi6jUuMjy4zliwiZXhbbGF0ZBsdWdpb1ZlcnNpb24iOiI1LjMuMyIsIm1pbkh1Yk9iamVjdHNWZXjaW9uljoMS4yLjAiLCjIYXhldWJPYmpIY3RzVmVyc2lvbi6jUuMjy40liwicmF3RXhhQ29cfZlcnNpb24iOiI1LjMuNCIsImluc3RhbmNIVWkjijoODdIZWE2MWltyTk2M00YjdilWI1NzUtzJE5MDRIOGU0ZDAliwiZWRpdG9yJp7ImFkbWluUHJvb2ZVcmxUZW1wbGF0ZS16mh0dHBzOi8vbmFib28uYRsXXNzaWfUlm5ldC9sb2dpbj9yZVRpcmVjdE NvdW50XHUhMDNKMVx1MDAyNmRlc3QdXjsXHUwMDNkaHR0cHMl0EIMkYIMkZuYWVb5hdGxhc3NpYW4ubmV0JTJGcGx1Z2lucyUyRnNlc...
```

Next

8. Select a project where you would like to sync issues received from the other side.

And click **Confirm**.

Accept invitation
×

Select a project for the incoming sync

Exalate generates default sync rules to synchronize basic issue fields. You can adapt the sync rules later. By default the following issue data will be synchronized: summary, description, comments, labels and attachments.

Please select the project where you want to create entities, received from the other side.\*

Select Project

◀ Previous
Confirm

Congratulations! The connection is set up.

Initiate connection
×

Congratulations!



Connection is established.

Configure Sync

# What's Next?

After accepting the connection invitation proceed to [configure the connection](#). Remember, with Exalate you need to set up the configuration for both integrating sides independently, depending on your integration requirements.

## Product

### ON THIS PAGE

[About Us](#) 

[Release History](#) 

[Accept the Connection Invitation in Script Mode from](#)

[Glossary](#) 

[Jira On-premise](#)

[API Reference](#) 

[What's Next?](#)

[Security](#) 

[Pricing and Licensing](#) 

## Resources

[Subscribe for a weekly Exalate hack](#) 

[Academy](#) 

[Blog](#) 

[YouTube Channel](#) 

[Ebooks](#) 

## Still need help?

[Join our Community](#) 

[Visit our Service Desk](#) 

[Find a Partner](#) 