

Accept the Connection Invitation in Script Mode for AzureDevOps Server & Service

Last Modified on 01/15/2026 7:17 pm EST

Note: To accept the Connection invitation you need an **Invitation Code**. The **Invitation Code** includes **pre-populated** Connection details such as Connection name, instance short names, and Destination instance URL. You are only required to finish the configuration by accepting the invitation.

Accept the Connection Invitation in Script Mode from Azure DevOps


1. Navigate to the **Connections** tab in the Exalate console.

Note: You can also access Exalate with this link:


```
https://dev.azure.com/{your_organization_name}/_settings/idalko-tools.exalate.adnode
```

To navigate to the **Connections** tab:


1. Click **Organization settings**.

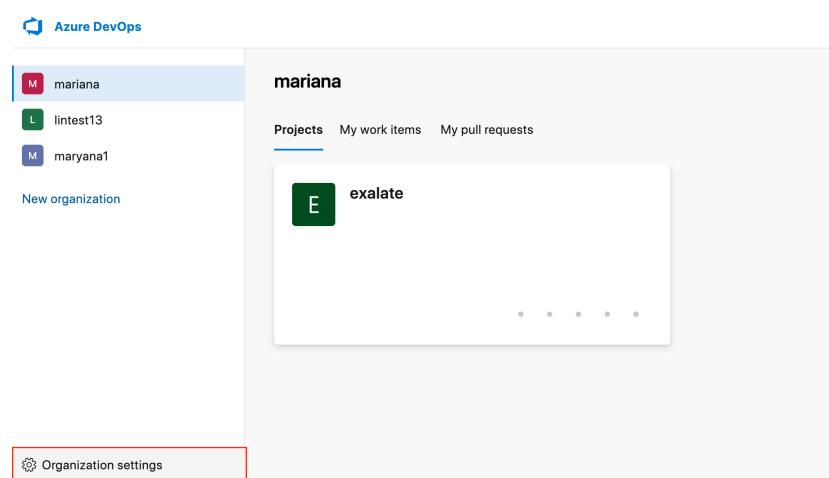

2. Click **Exalate** in the **Extensions** section.

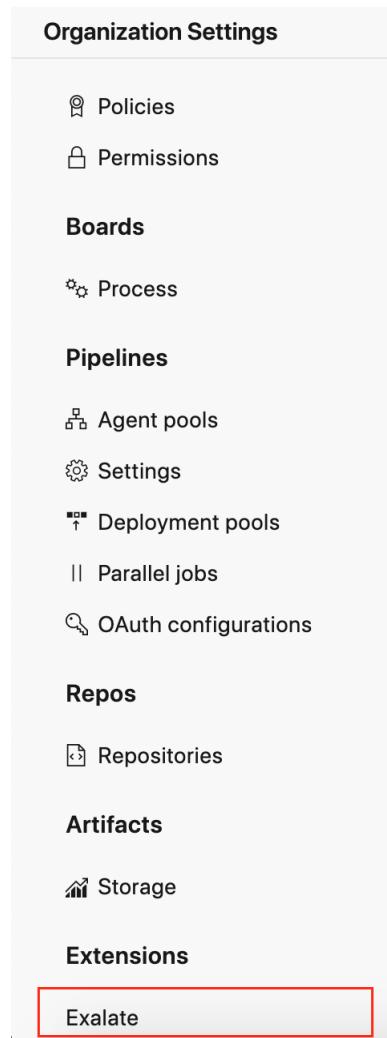

3. Click **Connections**.

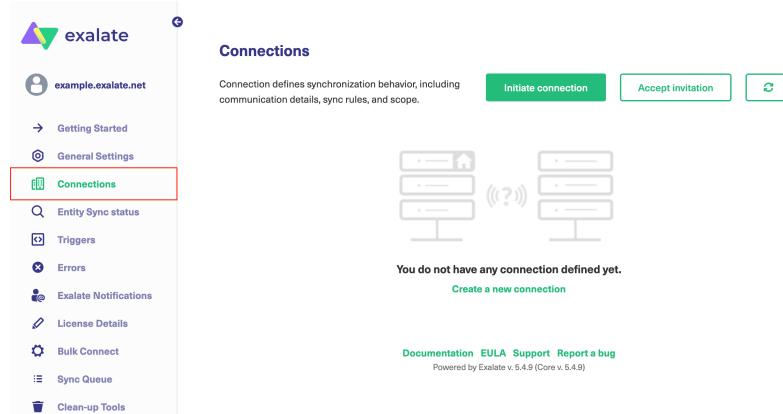

2. Click **Accept invitation**.



3. Paste the invitation code.

Paste the invitation code that you received from the other side.

And click **Next**.

Accept Invitation ×

Please paste the invitation code, received from your partner

Enter the invitation code

```
eyJpbnZpdGF0aW9uU2VjcmV0joiNUI2SnpGckZHbGhqZlNrVGIQb1NKN3pablp0cV3MWUiLCJpbnZpdGVkSW5zdGFuY2VvawWQiO
iJmMDYwYmE2Yy0xNTg5LTQxNDUyTk2MS03MGlzNWUyMjgzZjQlCjub2RISW5mby6eyJuYW1ljoibmFib28lLCjIXXNIVXsljoiaH
R0cHM6LyqgY2xvdWrb2RILWxxZ2Yb3Zze14c250LXFicmEuZkhbGF0Z5jbG91ZCslmz3cVlVHjhY2tclVbC16mh0dHz0i8v
bmFib28uYXRsyXNzaWFuLm5ldCslm5vZGVUeXBljoiSkiSQV9DTE9VRClslmz3cVlVHjhY2tclZlcnNpb24iOi3LjAuMClsm5vZGVb
cHBWZXjaW9uljoiNy4wLjAiLCjub2RlVmVyc2lvbi6jUuM4zliwiZkhbGF0ZBsdVdpbZlcnNpb24iOi1LjMuMyls1pbkh1Yk9ia
mVjdHNWZXjaW9uljoiMS4yLjAiLCjtyXhldWJPYmpY3RzVmVyc2lvbi6jEuMTQuMClslm1pbjUc3RWZXjaW9uljoiMS4wLjAiLCjY
XhS2XN0VmVyc2lvbi6jUuM4wiwicG9sE9ubhkiOm2zhHNlCjleGFDb21wVmVyc2lvbi6jUuM40liwicmF3RXhhQ29tcfZlcnNp
b24iOi1LjMuNClsm1uc3RhbmNIVVlkjoiODdiZWE2MWVtTk2Mi00YjdiLW1NzUzjE5MDRIOGU0ZDA3liwiZWRpdG9yjlp7lmFkb
WluUHJvb2ZcmxUZw1wbGF0ZS16mh0dHz0i8vbmFib28uYXRsyXNzaWFuLm5ldC9sb2dpbj9yZWRpcmJjdE NvdW50XHuwMD
NkMv1MDAyNmRlc3QtdXsXHUlwMDNkaHR0cHMIM0EiMkYlMKZlYwvb5hdGxh3NpYW4ubmVOlTGcGx1Z2lucyUyRnNlc...
```

Next

4. Select a project where you would like to sync issues received from the other side.

And click **Confirm**.

Accept invitation ×

Select a project for the incoming sync

Exalate generates default sync rules to synchronize basic issue fields. You can adapt the sync rules later. By default the following issue data will be synchronized: summary, description, comments, labels and attachments.

Please select the project where you want to create entities, received from the other side.*


Select Project | ▾

◀ Previous Confirm

Congratulations! The connection is set up.

Accept invitation ×

Congratulations!



Connection is established.

Configure Sync

What's Next?

After accepting the connection invitation proceed to [configure the connection](#). Remember, with Exalate you need to set up the configuration for both integrating sides independently, depending on your integration requirements.

Product

ON THIS PAGE

[About Us](#) 

[Release History](#) 

[Accept the Connection Invitation in Script Mode from](#)

[Glossary](#) 

[Azure DevOps](#)

[API Reference](#) 

[What's Next?](#)

[Security](#) 

[Pricing and Licensing](#) 

Resources

[Subscribe for a weekly Exalate hack](#) 

[Academy](#) 

[Blog](#) 

[YouTube Channel](#) 

[Ebooks](#) 

Still need help?

[Join our Community](#) 

[Visit our Service Desk](#) 

[Find a Partner](#) 