

Bulk Unexalate


Last Modified on 01/20/2026 7:12 am EST

Tags: unexalate

Step 1: Create a Trigger

Step 2: Unexalate the Entities

To stop the synchronization you need to **Bulk Unexalate** the trigger. It helps to stop the synchronization of all entities that fit the trigger search queries.

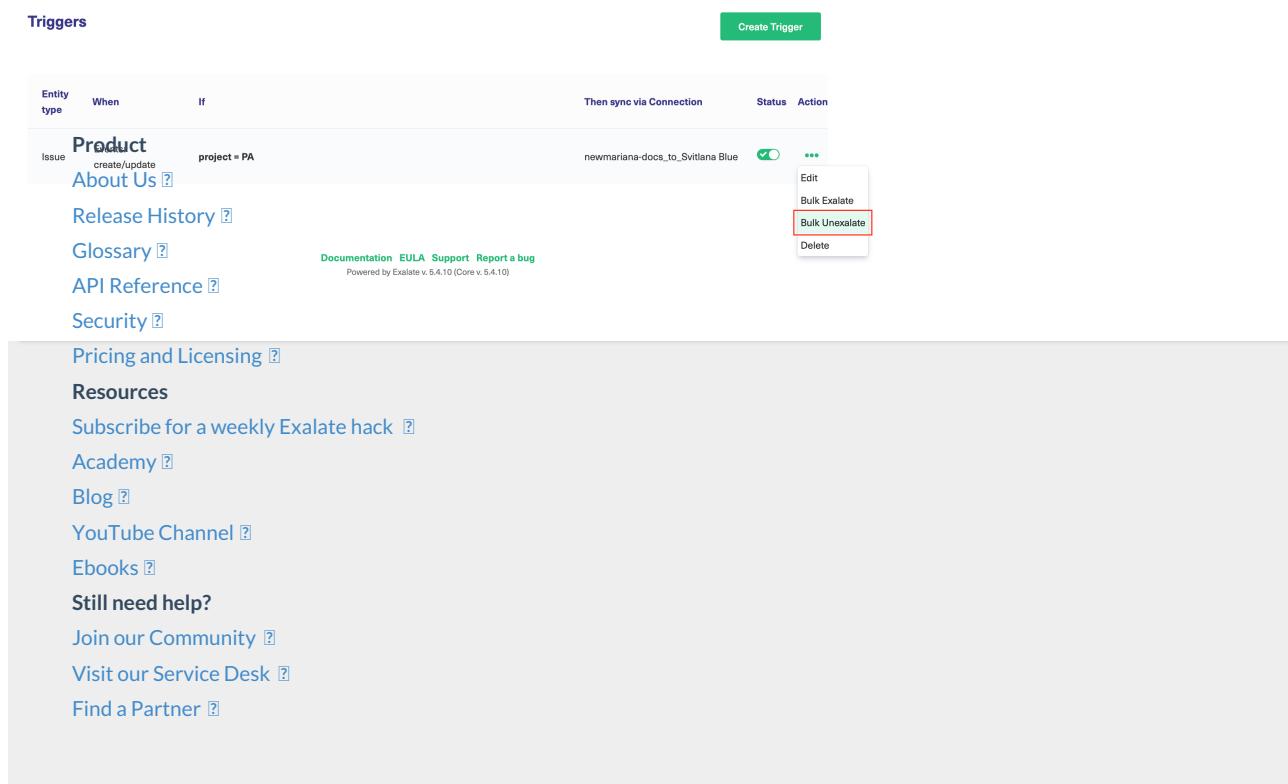

The screenshot shows the 'Triggers' page in the Exalate interface. At the top right is a 'Create Trigger' button. Below it is a table with columns: Entity type, When, If, Then sync via Connection, Status, and Action. A context menu is open over a row for a 'Product' entity. The menu items are: Edit, Bulk Exalate, Bulk Unexalate (which is highlighted with a red box), and Delete. The 'Bulk Unexalate' option is the target of the red box.

| Entity type | When | If | Then sync via Connection | Status | Action |
|-------------|-----------------------|--------------|----------------------------------|--------|--|
| Issue | Product create/update | project = PA | newmariana-docs_to_Svitlana Blue | On | <ul style="list-style-type: none">...EditBulk ExalateBulk UnexalateDelete |

[Documentation](#) [EULA](#) [Support](#) [Report a bug](#)
Powered by Exalate v. 5.4.10 (Core v. 5.4.10)

[About Us](#) [Release History](#) [Glossary](#) [API Reference](#) [Security](#) [Pricing and Licensing](#)

Resources

[Subscribe for a weekly Exalate hack](#) [Academy](#) [Blog](#) [YouTube Channel](#) [Ebooks](#)

Still need help?

[Join our Community](#) [Visit our Service Desk](#) [Find a Partner](#)